


Two* and Six* Gallon Milk Batch Cheese Press Parts Diagram and Assembly Instructions

**You may have either the Two, Six or Two & Six Milk Batch model.*



Attach pressure spring either onto bottom nut or place in INSET on top of washer once the curds are well drained, and placed evenly inside hoop. Prior to reassembling press, use your hand to press curds using the follower.

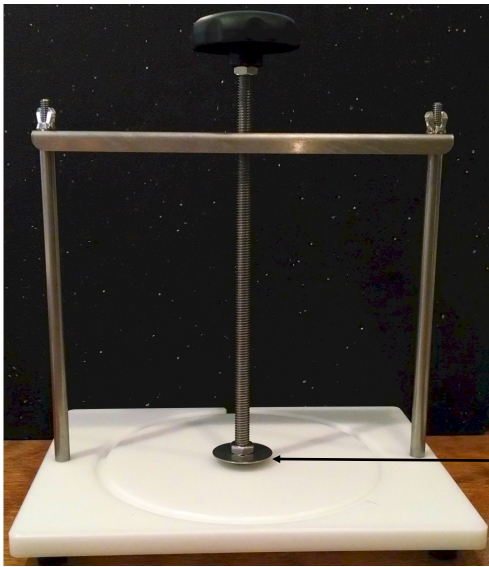

1. Attach Pressure Spring onto the nut at the end of the THREADED ROD. Or place in INSET hole in follower on top of washer.
2. Place HOOP on BASE, fill HOOP with well drained curds. Make sure the curds are evenly distributed in the HOOP.
3. Place FOLLOWER on top of the curds inside HOOP and press down firmly using your hand(s).
4. Place WASHER inside INSET on FOLLOWER.
5. Place assembly of THREADED ROD (with SPRING attached) inside HOOP and reattach WING NUTS.
6. Turn KNOB clockwise to take up slack and you just begin to feel a little pressure. Then count about 5 turns of the KNOB. Increase turns in about one hour. Ten turns is approximately 40-50 lbs. of pressure.